

Meda
Velvet

Composition: %100 PES
Width [cm]: 140
Weight [gr/m²]: 320 ± %5
Martindale: 20.000 rubs [EN ISO 12947-2]
Martindale 3.000 Cycle: 4 [EN ISO 20105-A02]
Martindale-Pilling 2.000 Cycle: 4/5 [EN ISO 12945-2]
Colour Fastness Rubbing: Warp: 4/5 Weft: 4/5 [EN ISO 105-X12{Dry/Wet}]
Seam Slippage: Warp: 2.6 Weft: 2.2 [EN ISO 13936-2]
Tear Strength: Warp: 80 Weft: 140 [EN ISO 13937-3]
Tensile Strength: Warp: 800 Weft: 700 [EN ISO 13937-3]
Flammability: BS 5852 PART 1 SOURCE 0 / EN 1021-1 / CALL 117 / NFPA 260 [CIGARETTE]



Classic
Velvet

Composition: %100 PES
Width [cm]: 140
Weight [gr/m²]: 480 ± %5
Martindale: 100.000 rubs [EN ISO 12947-2]
Martindale 3.000 Cycle: 4 [EN ISO 20105-A02]
Martindale-Pilling 2.000 Cycle: 4/5 [EN ISO 12945-2]
Colour Fastness Rubbing: Warp: 4/5 Weft: 4/5 [EN ISO 105-X12{Dry/Wet}]
Seam Slippage: Warp: 2 Weft: 2.5 [EN ISO 13936-2]
Tear Strength: Warp: 60 Weft: 80 [EN ISO 13937-3]
Tensile Strength: Warp: 1400 Weft: 800 [EN ISO 13934-1]
Flammability: BS 5852 PART 1 SOURCE 0 / EN 1021-1 / CALL 117 / NFPA 260 [CIGARETTE]



Malibu
Velvet

Composition: %52 CO %48 PES
Width [cm]: 140
Weight [gr/m²]: 420 ± %5
Martindale: 100.000 rubs [EN ISO 12947-2]
Martindale 3.000 Cycle: 4/5 [EN ISO 20105-A02]
Martindale-Pilling 2.000 Cycle: 4/5 [EN ISO 12945-2]
Colour Fastness Rubbing: Warp: 4/5 Weft: 4/5 [EN ISO 105-X12{Dry/Wet}]
Seam Slippage: Warp: 2.9 Weft: 2.2 [EN ISO 13936-2]
Tear Strength: Warp: 80 Weft: 60 [EN ISO 13937-3]
Tensile Strength: Warp: 1417 Weft: 967 [EN ISO 13934-1]
Flammability: BS 5852 PART 1 SOURCE 0 / EN 1021-1 / CALL 117 / NFPA 260 [CIGARETTE]



Santana
Artificial Leather

Composition: Vinly
Backing: %100 PES
Weight: 550±40 g/m² [ISO 2286-2]
Martindale: >22.000 rubs [ISO 5470-2]
Tear Strenght: Across >25N ; Along >25N [ISO 4674-1]
Tensile Strenght: Across >150N ; Along >350N [ISO 1421]
Elongation at braeak: Across 280±20% ; Along 75±20% [ISO 1421]
Color fastness to rubbing: Dry >=4GS ; Wet >=4GS [ISO 105-X12]
Light Fastness: Light Colors >=4BW ; Dark Colors >=5BW [ISO 105-B02]



Inspiration Card S

Group B & C

Santana-B
Meda-B
Malibu-C
Classic-C




sense collection

deberenn




Santana
020




Meda
0021



Meda
00E6




Classic
0073

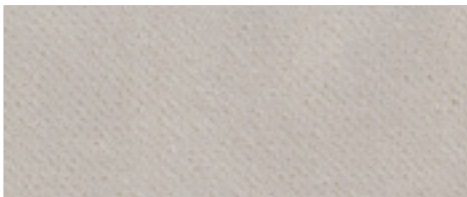

Classic
00T6



Malibu
00N6

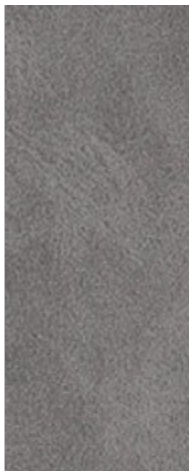


Santana
620




Malibu
00E6



Meda
0038




Meda
00L8

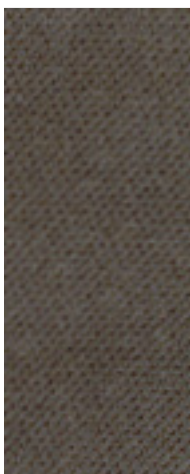

Classic
00C9




Meda
0016




Santana
025




Malibu
00J5



Classic
00B8



Malibu
00L8

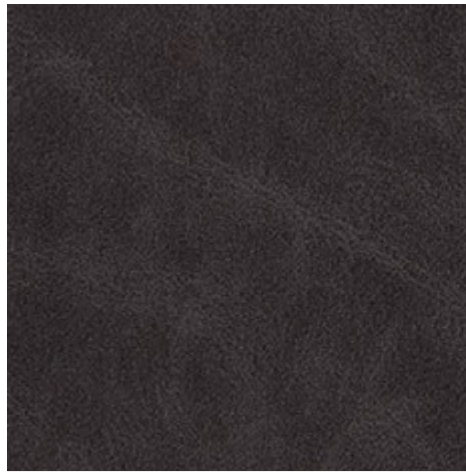

Santana
625




Malibu
00M4




Classic
00G7




Meda
00W6



Classic
0024



Classic
00G9

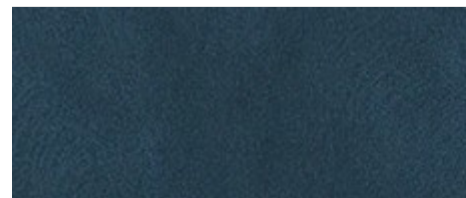

Santana
420



Meda
0048




Malibu
0032



Malibu
0001



Meda
00H9



Malibu
00Z3




Meda
00E1



Classic
00L6



Classic
0001




Classic
0027



Malibu
00CF



Meda
00CA




Classic
00BM




Classic
0016



Meda
00S3

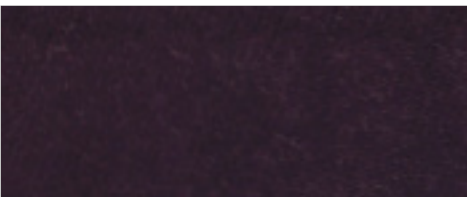

Classic
00B7




Meda
00EA




Meda
00Y8



Santana
315



Classic
0003




Meda
00D9



Malibu
00P1




Meda
00Z2

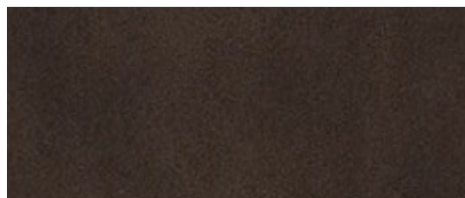


Santana
333




Malibu
00T2

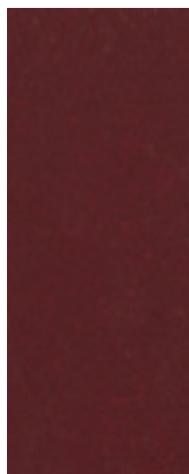


Classic
0018




Santana
340




Classic
00J3

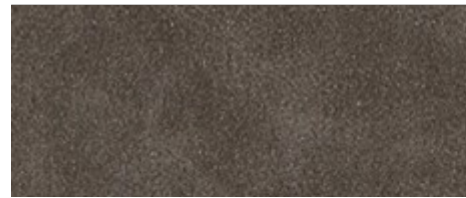

Santana
610



Meda
0076

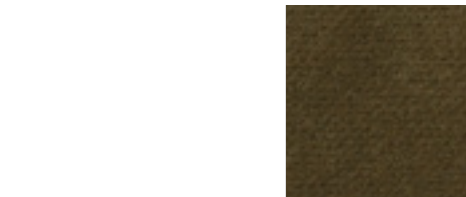

Classic
00B2



Santana
270

Field 2

Designed by Alfredo Haberli

Application Offices, hotels, institutions, domestic use. Great durability.
Description 100% Trevira CS. Width app. 55 inches (140 cm). Weight app. 450 g/lin.m, 14.5 oz/ly. Yarn dyed. Colour differences may occur.

Selvedge/Direction ↔
Abrasion App. 80.000 rubs acc. to the Martindale method. EN ISO 12947*.
Lightfastness (ISO) 6-7.
Pilling (EN ISO) 4-5.
Fastness to rubbing (ISO) dry 4-5, wet 4-5.
Sound absorption (EN ISO 354) 0.55/Class D (flat), 0.85/Class B (waved).
Airflow 431 Pa s/m.

Flame resistance: AS/NZS 3837 Class 1. ASTM E84 Class A unadhered. BS 5852 Grib 5. CAN ULC S102. CAN ULC S109. DIN 4102 B1. EN 1021-1/2. EN 13 501 B s1-d0. FAR 25.853. GB 8624 B1. IMO FTP Code 2010:Part 8. NF D 60 013. NF P 92 507 M1. SN 198 898 5.2. UNI 9175 1IM. UNI 9177 Classe 1. US Cal. Bull. 117-2013. ÖNORM B1 / Q1. (Copy of test report available).
Care Please see the ISO symbols. Shrinkage app. 2% when washed at 60°C.
Disinfection, see www.kvadrat.dk.



Relate

Designed by Patricia Urquiola

Application Offices, hotels, institutions, domestic use. Great durability. In accordance with California AB2998 or similar regulation in other states of North America, this product should not be used for residential upholstery in USA.

Description 100% Trevira CS. Width app. 55 inches (140 cm). Weight app. 14.5 oz/ly (450 g/lin.m). Yarn dyed. Colour differences may occur.
Selvedge/Direction ↕
Abrasion App. 80.000 rubs acc. to the Martindale method. EN ISO 12947*.
Lightfastness (ISO) 5-7.
Pilling (EN ISO) 4-5.
Fastness to rubbing (ISO) dry 4-5, wet 4-5.
Sound absorption (EN ISO 354) 0.50/Class D (flat), 0.70/Class C (waved).
Airflow 2241 Pa s/m.
Flame resistance: AS/NZS 3837 Class 2. ASTM E84 class A unadhered. ASTM E84 class B adhered. BS 5852 Grib 5. BS 5852 part 1 with treatment. CAN ULC S102. CAN ULC S109. DIN 4102 B1. EN 1021-1/2. EN 13501 B-s1, d0. GB 8624 B1. IMO FTP Code 2010:Part 8. NF D 60 013. NF P 92 507 M1. NFPA 701. SN 198 898 5.2. UNI 9175 1IM. UNI 9177 classe 1. US Cai. Bull. 117-2013. ONORM B1 / 01. (Copy of test report available).
Care Please see the ISO symbols. Shrinkage app. 2% when washed at 60°C.
Disinfection, see www.kvadrat.dk.



Quality and environmental system accreditation according to ISO 9001 and ISO 14001.
*ACT Registered Certification Marks
Encouraging the use of sustainable fibres. Durable and high quality.
Hazardous substances restricted. Contact and further information www.kvadrat.dk

Reflect

Designed by Patricia Urquiola

Application Offices, hotels, institutions, domestic use. Great durability.
Description 100% recycled polyester. Width app. 55 inches (140 cm). Weight app. 13.9 oz/ly (430 g/lin.m). Yarn dyed. Colour differences may occur.

Selvedge/Direction ↕
Abrasion App. 100.000 rubs acc. to the Martindale method. EN ISO 12947*.
Lightfastness (ISO) 5-7.
Pilling (EN ISO) 4.
Fastness to rubbing (ISO) dry 5, wet 5.
Sound absorption (EN ISO 354) 0.45/Class D (flat), 0.70/Class C (waved).
Airflow 2430 Pa s/m.

Flame resistance: AS/NZS 3837 Class 1. ASTM E84 class A unadhered. ASTM E84 class B adhered. BS 5852 Crib 5 with treatment. BS 5852 part 1 with treatment. EN 1021-1/2. IMO FTP Code 2010: Part 8. NFPA 701 with treatment. US Cal. Bull. 117-2013. (Copy of test report available).
Care Please see the ISO symbols. Shrinkage app. 2% when washed at 60°C.
Disinfection, see www.kvadrat.dk.



Remix 3

Designed by Giulio Ridolfo

Application Offices, hotels, institutions, domestic use. Great durability.
Description 90% new wool, worsted, 10% nylon. Width app. 55 inches (140 cm). Weight app. 420 g/lin.m, 13.5 oz/ly. Material dyed. Colour differences may occur.

Selvedge/Direction ↔
Abrasion App. 100.000 rubs acc. to the Martindale method. EN ISO 12947*.
Lightfastness (ISO) 5-7.
Pilling (EN ISO) 4.
Fastness to rubbing (ISO) dry 4-5, wet 3-5.
Sound absorption (EN ISO 354) 0.55/Class D (flat), 0.80/Class B (waved).
Airflow 465 Pa s/m.
Flame resistance: AS/NZS 1530.3. AS/NZS 3837 Class 2. ASTM E84 class A Adhered. ASTM E84 class A Unadhered. BS 5852 Grib 5 with treatment. BS 5852 part 1. EN 1021-1/2. GB 50222 B1 with treatment. IMO FTP Code 2010:Part 7 with treatment. IMO FTP Code 2010:Part 8. NF D 60 013. NFPA 260. SN 198 898 5.3 with treatment. UNI 9175 1IM. US Cal. Bull. 117-2013. ÖNORM B1 / Q1. (Copy of test report available).
Care Please see the ISO symbols.
Disinfection, see www.kvadrat.dk.



10 year warranty

US contact info: 1-800-620-9309

Inspiration Card




Group C

Field 2
Reflect
Relate
Remix 3

kvadrat


deberenn

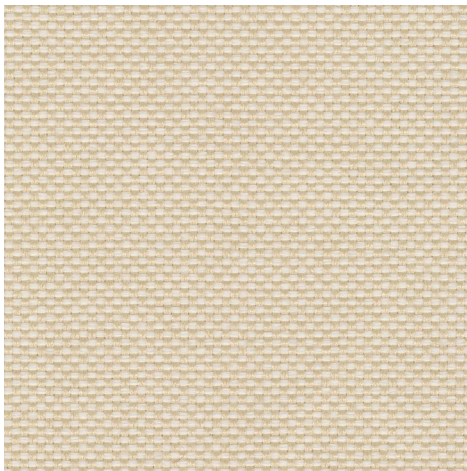

Field 2
0222




Reflect
0114

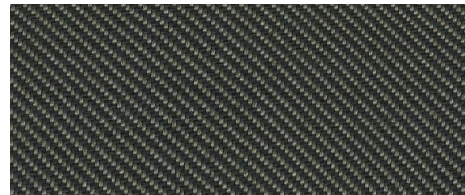


Relate
0181



Reflect
0164



Remix 3
0123

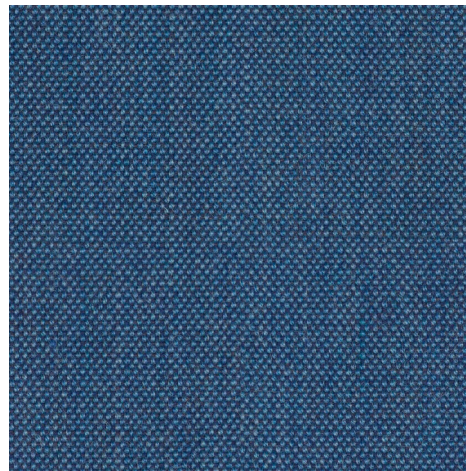


Remix 3
0762



Remix 3
0816




Remix 3
0823




Reflect
0944



Remix 3
0933




Relate
0401




Field 2
0443




Field 2
0463



Reflect
0564



Reflect
0614

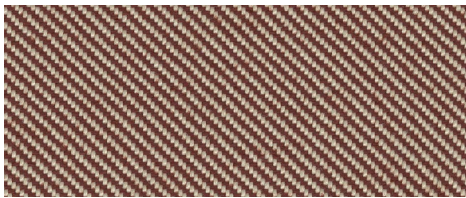


Relate
0341



Remix 3
0233




Field 2
0343

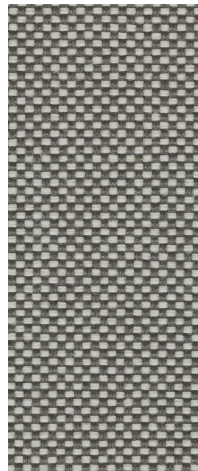


Field 2
0132




Field 2
0793



Reflect
0174




Relate
0741



Remix 3
0753




Remix 3
0933




Remix 3
0923




Remix 3
0433




Remix 3
0452




Remix 3
0516



Remix 3
0612




Remix 3
0672



Remix 3
0383



Remix 3
0233




Field 2
0343



Remix 3
0143




Remix 3
0163




Field 2
0182



Remix 3
0152




Remix 3
0743




Field 2
0723




Field 2
0782




Relate
0921



Field 2
0943

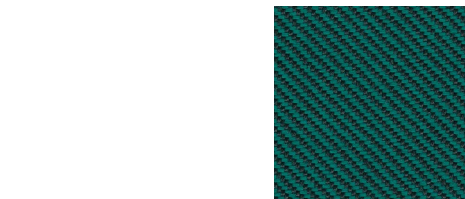


Remix 3
0982

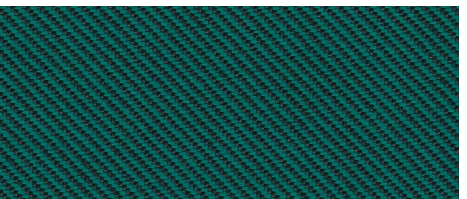


Reflect
0984




Remix 3
0252

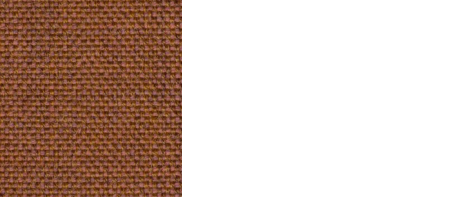


Remix 3
0452

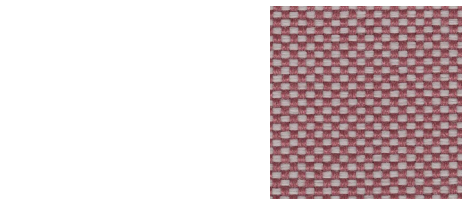


Relate
0571

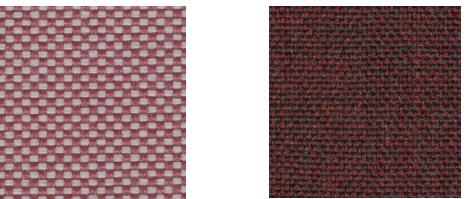

Field 2
0623

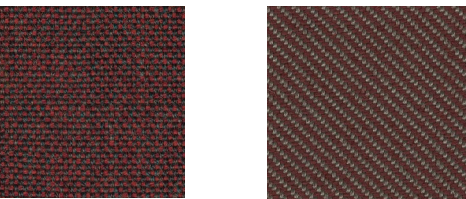

Remix 3
0682



Reflect
0374



Remix 3
0223



Field 2
0233

Broken Twill Weave
Designed by Jonathan Olivares

Application Offices, hotels, institutions, domestic use. Great durability.
Description 100% post-consumer recycled polyester.
Width app. 140 cm (55 inches). **Weight** app. 500 g/lin.m (16.1 oz/ly).
Yarn dyed. Colour differences may occur.
Selvedge/Direction ⇄
Abrasion App. 95,000 rubs acc. to the Martindale method. EN ISO 12947*.
Lightfastness (ISO) 7.
Pilling (EN ISO) 5.
Fastness to rubbing (ISO) dry 5, wet 5.
Sound absorption (EN ISO 354) 0.55/Class D (flat), 0.80/Class B (waved).
Airflow 355 Pa s/m.
Flame resistance: AS/NZS 3837 Class 1. ASTM E84 class A adhered. ASTM E84 Class A unadhered. BS 5852 Grib 5 with treatment. BS 5852 part 1 with treatment. EN 1021-1/2. IMO FTP Code 2010:Part 8. US Cal. Bull. 117-2013. (Copy of test report available).
Care Please see the ISO symbols. Shrinkage app. 2% when washed at 60°C.
Disinfection, see www.kvadrat.dk.



Canvas 2
Designed by Giulio Ridolfo

Application Offices, hotels, institutions, domestic use. Great durability.
Description 90% new wool, worsted, 10% nylon.
Width app. 140 cm (55 inches). **Weight** app. 480 g/lin.m (15.5 oz/ly).
Material dyed. Colour differences may occur.
Selvedge/Direction ⇄
Abrasion App. 100,000 rubs acc. to the Martindale method. EN ISO 12947*.
Lightfastness (ISO) 5-6.
Pilling (EN ISO) 4.
Fastness to rubbing (ISO) dry 4-5, wet 4-5.
Sound absorption (EN ISO 354) 0.60/Class C (flat), 0.80/Class B (waved).
Airflow 849 Pa s/m.
Flame resistance: AS/NZS 1530.3. ASTM E84 class A adhered. ASTM E84 Class A unadhered. BS 5852 Grib 5 with treatment. BS 5852 part 1. EN 1021-1/2. IMO FTP Code 2010:Part 8. NF D 60 013. NFPA 260. SN 198 898 5.3 with treatment. UNI 9175 11M. US Cal. Bull. 117-2013. ÖNORM B1 / Q1. (Copy of test report available).
Care Please see the ISO symbols.
Disinfection, see www.kvadrat.dk.



Melange Nap
Designed by Akira Minagawa

Application Offices, hotels, institutions, domestic use. Great durability.
Description 97% new wool, worsted, 3% nylon.
Width app. 140 cm (55 inches). **Weight** app. 440 g/lin.m (14.2 oz/ly).
Material dyed. Colour differences may occur.
Selvedge/Direction ⇄
Abrasion App. 60,000 rubs acc. to the Martindale method. EN ISO 12947*.
Lightfastness (ISO) 6.
Pilling (EN ISO) 3-4.
Fastness to rubbing (ISO) dry 4-5, wet 4-5.
Sound absorption (EN ISO 354) 0.55/Class D (flat), 0.80/Class B (waved).
Airflow 521 Pa s/m.
Flame resistance: AS/NZS 3837 Class 2. ASTM E84 class A unadhered. ASTM E84 Class B adhered. BS 5852 Grib 5 with treatment. BS 5852 Part 1. EN 1021-1/2. IMO FTP Code 2010:Part 8. NF D 60 013. SN 198 898 5.3 with treatment. UNI 9175 11M. US Cal. Bull. 117-2013. (Copy of test report available).
Care Please see the ISO symbols.
Disinfection, see www.kvadrat.dk.



Re-wool
Designed by Margrethe Odgaard

Application Offices, hotels, institutions, domestic use. Great durability.
Description 45% recycled wool, 45% new wool, worsted, 10% nylon.
Width app. 140 cm (55 inches). **Weight** app. 540 g/lin.m (17.4 oz/ly).
Yarn dyed. Colour differences will occur.
Selvedge/Direction ⇄
Abrasion: App. 100,000 rubs acc. to the Martindale method EN ISO 12947*.
Lightfastness (ISO) 5-7.
Pilling (EN ISO) 4.
Fastness to rubbing (ISO) dry 4-5, wet 4-5.
Sound absorption (EN ISO 354) 0.50/Class D (flat), 0.75/Class C (waved).
Airflow 258 Pa s/m.
Flame resistance: AS/NZS 1530.3. AS/NZS 3837 Class 2. BS 5852 Crib 5 with treatment. BS 5852 part 1. EN 1021-1/2. IMO FTP Code 2010:Part 8. NF D 60 013. SN 198 898 5.3 with treatment. UNI 9175 11M. US Cal. Bull. 117-2013. ÖNORM B1 / Q1. (Copy of test report available).
Care Please see the ISO symbols.
Disinfection, see www.kvadrat.dk.




Steelcut 3
Designed by Frans Dijkmeijer and Giulio Ridolfo

Application Offices, hotels, institutions, domestic use. Great durability.
Description 90% new wool, worsted, 10% nylon.
Width app. 140 cm (55 inches). **Weight** app. 825 g/lin.m (26.6 oz/ly).
Piece dyed. Foreign fibres may occur in light colours. Colour differences may occur.
Selvedge/Direction ⇄
Abrasion App. 100,000 rubs acc. to the Martindale method. EN ISO 12947*.
Lightfastness (ISO) 5-7.
Pilling (EN ISO) 3-4.
Fastness to rubbing (ISO) dry 4-5, wet 4.
Sound absorption (EN ISO 354) 0.65/Class C (flat), 0.80/Class B (waved).
Airflow 1014 Pa s/m.
Flame resistance: AS/NZS 1530.3. AS/NZS 3837 Class 2. ASTM E84 class A unadhered. ASTM E84 Class B adhered. BS 5852 Grib 5 with treatment. BS 5852 part 1. EN 1021-1/2. IMO FTP Code 2010:Part 8. NF D 60 013. NFPA 260. SN 198 898 5.3 with treatment. UNI 9175 11M. US Cal. Bull. 117-2013. ÖNORM B2 / Q1. (Copy of test report available).
Care Please see the ISO symbols.
Disinfection, see www.kvadrat.dk.



Steelcut Trio 3
Designed by Frans Dijkmeijer and Giulio Ridolfo

Application Offices, hotels, institutions, domestic use. Great durability.
Description 90% new wool, worsted, 10% nylon.
Width app. 140 cm (55 inches). **Weight** app. 770 g/lin.m (24.8 oz/ly).
Yarn dyed. Colour differences may occur.
Selvedge/Direction ⇄
Abrasion: App. 100,000 rubs acc. to the Martindale method EN ISO 12947*.
Lightfastness (ISO) 5-7.
Pilling (EN ISO) 4.
Fastness to rubbing (ISO) dry 4-5, wet 3-5.
Sound absorption (EN ISO 354) 0.70/Class C (flat), 0.95/Class A (waved).
Airflow 910 Pa s/m.
Flame resistance: AS/NZS 1530.3. AS/NZS 3837 Class 2. ASTM E84 Class B unadhered. ASTM E84 Class B adhered. BS 5852 Crib 5 with treatment. BS 5852 part 1. EN 1021-1/2. GB 50222 B1 with treatment. IMO FTP Code 2010:Part 8. NF D 60 013. NFPA 260. SN 198 898 5.3 with treatment. UNI 9175 11M. US Cal. Bull. 117-2013. ÖNORM B1 / Q1. (Copy of test report available).
Care Please see the ISO symbols.
Disinfection, see www.kvadrat.dk.

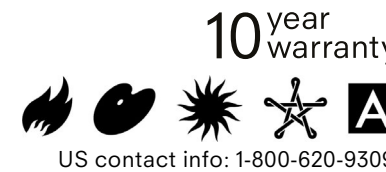

US contact info: 1-800-620-9309

Inspiration Card 2

Group D & E


Broken Twill Weave – D
Canvas 2 – D
Melange Nap – D
Re-wool – D
Steelcut 3 – E
Steelcut Trio 3 – E



kvadrat

deberenn

Quality and environmental system accreditation according to ISO 9001 and ISO 14001.
*ACT Registered Certification Marks. Abrasion test results exceeding ACT performance guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.
EU Ecolabel: Encouraging the use of sustainable fibres. Durable and high quality.
Hazardous substances restricted. Contact and further information www.kvadrat.dk

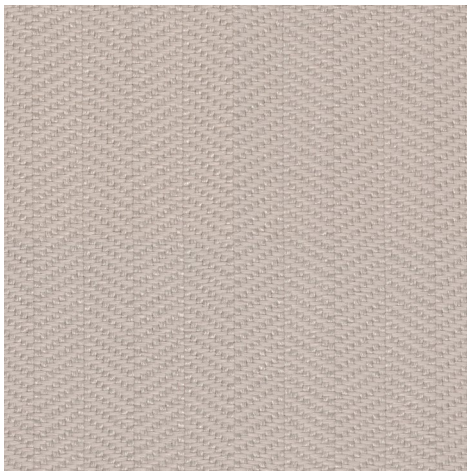

Broken Twill Weave
0216



Steelcut Trio 3
0226



Re-wool
0108



Re-wool
0158



Canvas 2
0114



Re-wool
0128



Canvas 2
0134



Melange Nap
0171



Steelcut Trio 3
0133




Melange Nap
0111



Steelcut Trio 3
0153




Re-wool
0198




Steelcut 3
0160



Steelcut Trio 3
0124

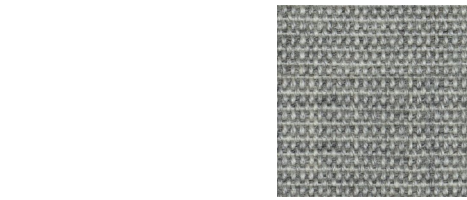

Canvas 2
0124

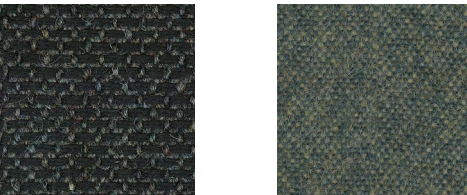


Melange Nap
0951




Steelcut Trio 3
0124




Steelcut 3
0190

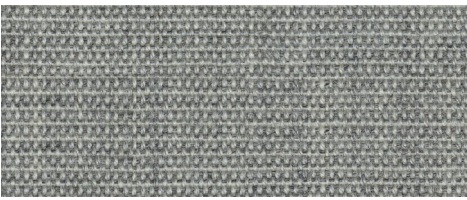


Canvas 2
0124

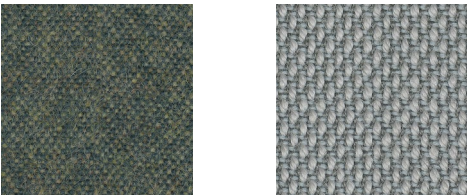


Steelcut Trio 3
0113

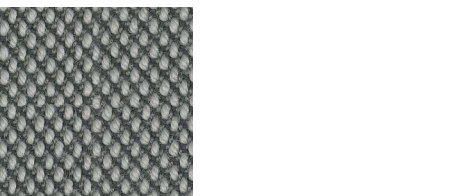

Steelcut Trio 3
0124

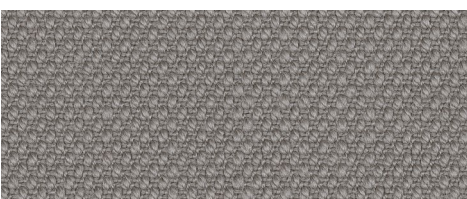


Steelcut 3
0155

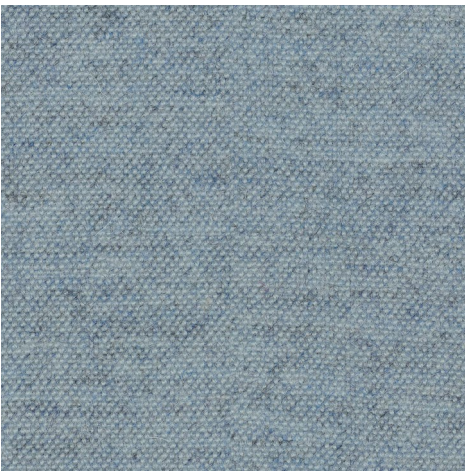


Melange Nap
0711




Re-wool
0718

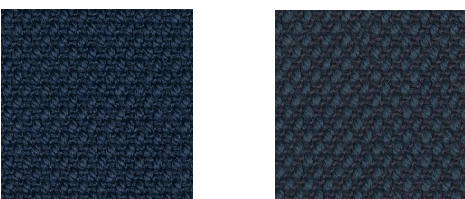


Steelcut Trio 3
0796

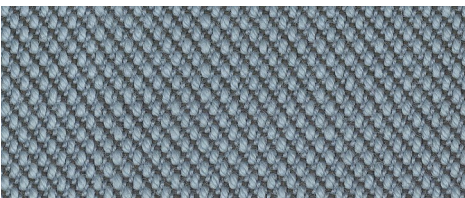

Steelcut Trio 3
0713

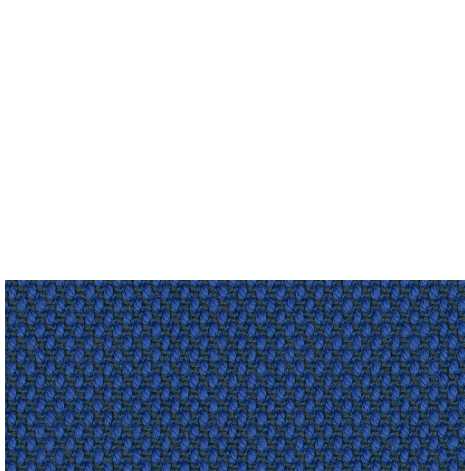

Steelcut Trio 3
0746

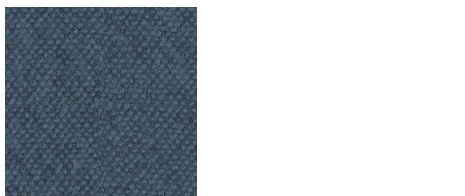

Melange Nap
0751




Steelcut Trio 3
0796



Canvas 2
0794




Melange Nap
0191

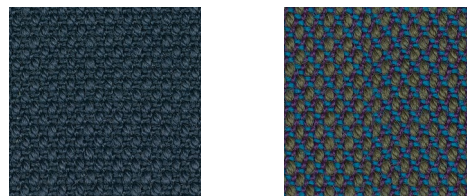


Steelcut 3
0780




Broken Twill Weave
0826

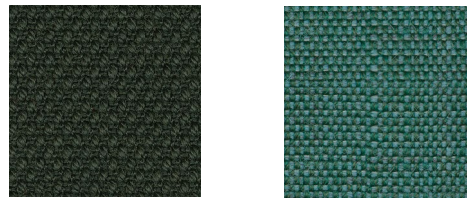


Steelcut 3
0975

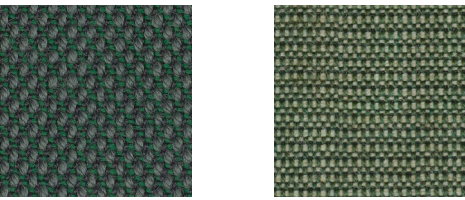


Steelcut Trio 3
0966

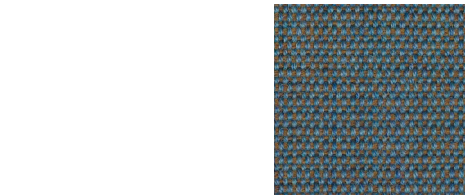


Steelcut Trio 3
0883

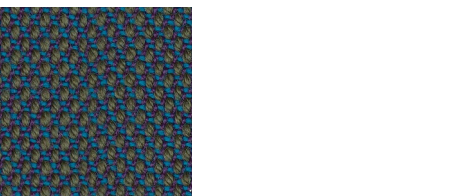


Canvas 2
0836

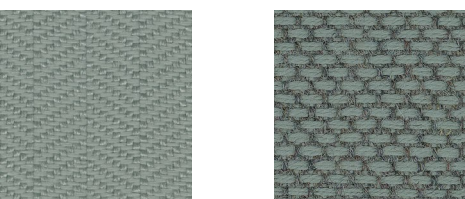

Re-wool
0868

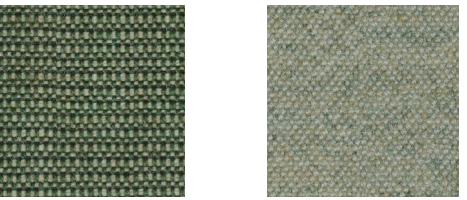

Canvas 2
0926

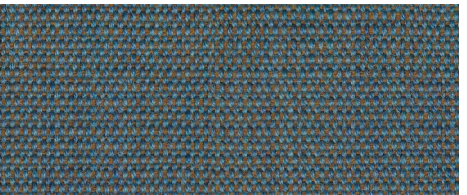


Canvas 2
0734




Canvas 2
0996




Re-wool
0868

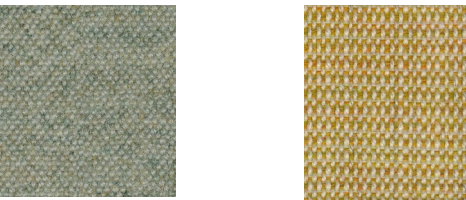

Melange Nap
0911

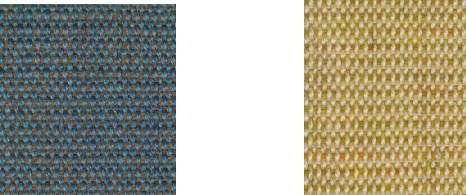

Steelcut Trio 3
0253

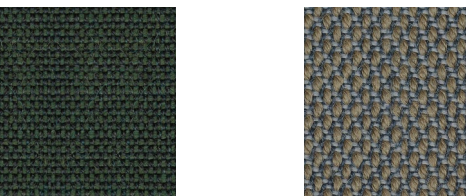


Canvas 2
0154




Re-wool
0218




Steelcut 3
0445

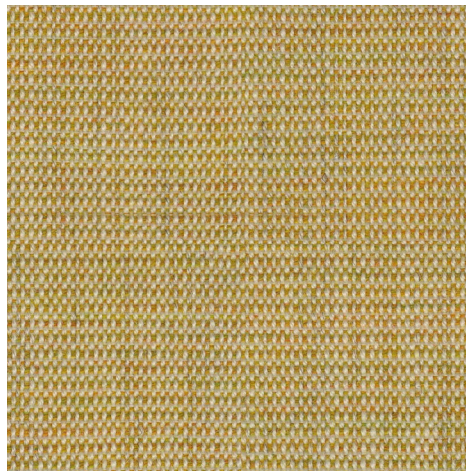


Canvas 2
0414

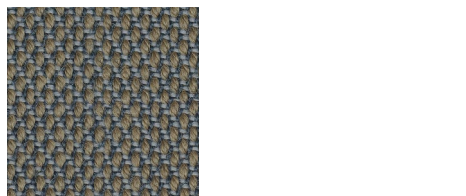


Steelcut Trio 3
0253

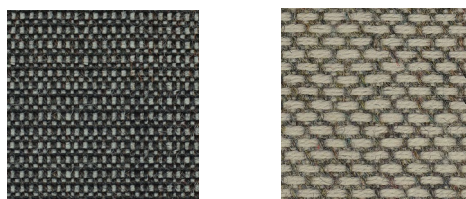

Re-wool
0218

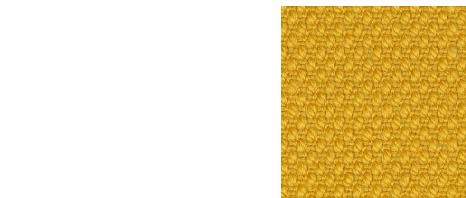

Steelcut 3
0445

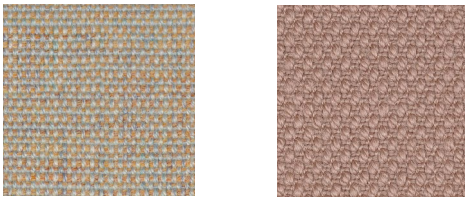


Canvas 2
0224




Steelcut 3
0240



Canvas 2
0446

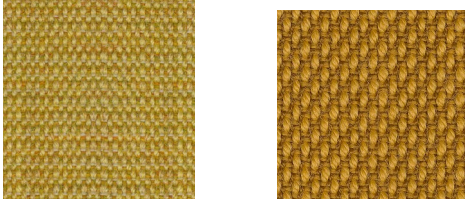

Steelcut Trio 3
0453

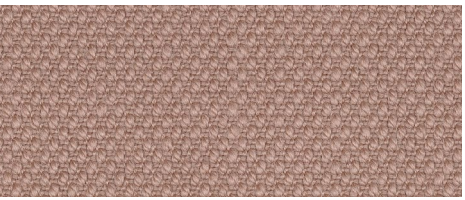


Steelcut 3
0605




Steelcut 3
0240




Steelcut Trio 3
0636

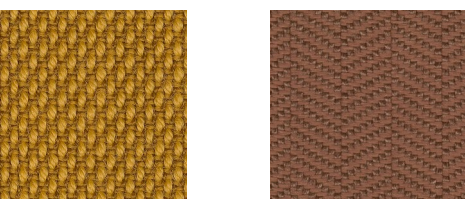


Steelcut Trio 3
0453

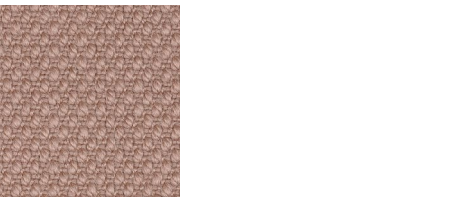


Broken Twill Weave
0616

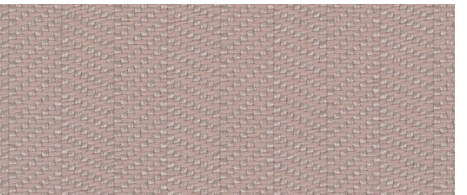


Canvas 2
0454

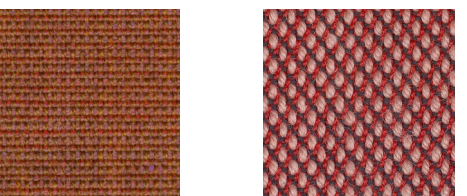


Broken Twill Weave
0376

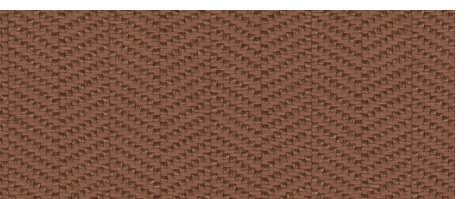

Canvas 2
0174

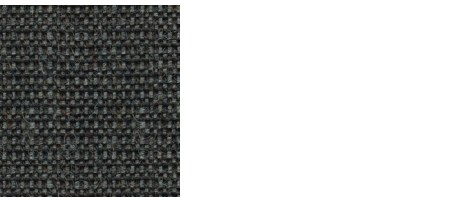


Steelcut Trio 3
0515

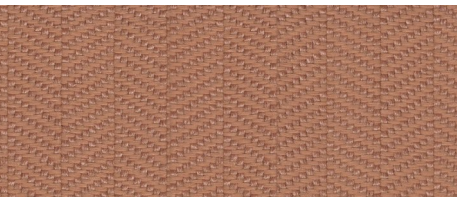


Broken Twill Weave
0336



Canvas 2
0614

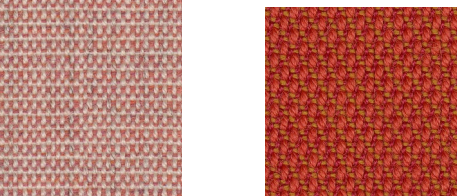

Steelcut Trio 3
0533

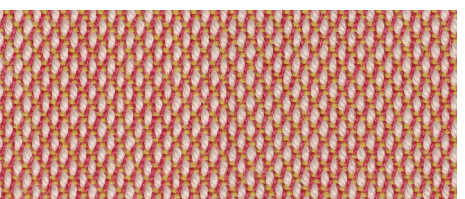

Steelcut Trio 3
0515

L

dēberenn

artificial & genuine leathers

king • vita • sierra

king

group B



vita

group C



sierra

group E



king

Product information

King has a soft touch and high quality which creates a lot of using areas for many years. Comprising a variety of designs, the range offers a mixed palette of subtle trend colours and traditional brights.

Technical information

Composition
76% PVC, 22% Polyester, 2% PU
Weight
658 gr/m2 ±5 [TS 6450]
Thickness
0.85 mm ±5 [ISO 2589]
Width
138/140cm [TS 4119]
Abrasion Resistance
230,000 Martindale Cycles [BS EN ISO 12947-2:1999&4:1999]
Bursting Strength
>600 kPa [BS EN ISO 5470-1: 1999]
Seam Slippage Resistance
6 mm Seam Resistance
Warp: > 250 N Weft: > 250 N [BS 3320:1998]
6 mm Seam Opening
Warp: > 164 N Weft: NF [BS 3320:1998]
Tear Strength
Weft: 2853g - Warp: 5803g [BS EN ISO 4674-1:1999]
Light Fastness
5 [DIN EN ISO 105 - B02: 2002]
Flammability
Pass [BS 5852-1: 1979]

vita

Product information

Vita is a leather-look vinyl, with a subtle surface grain effect and full matt appearance. It provides maximum protection for heavy duty end-use areas in sectors such as contract, healthcare and hospitality. It is available in a broad palette of 51 considered colourways, designed to enhance and connect with other Camira products, including the Halcyon Collection of treated fabrics.

Vita does not contain phthalate plasticisers or heavy metals, yet remains soft, stretchy and pliable.

Technical information

Industry Application
Workplace, Education, Healthcare, Hospitality & Leisure
Composition
Surface: 98% PVC, 2%. PU Substrate: 100% Cotton
Width
140 cm minimum
Weight
850 g/m ² ±10%
Abrasion Resistance
Heavy duty / 5 year guarantee ISO 5470-2 100,000 rubs [Grade 2 minimum]
Flammability
EN 1021 - 1&2 Cigarette & Match
BS 7176 Low Hazard
BS 5852 Ignition Souce 5
BS 7176 Medium Hazard
BS 5852 Ignition Source 7 [with interliner]
UNI 9175 Classe 1 IM
Flexes
ISO 7854 Method B 400,000 Flexing cycles / 5 year guarantee [full details available]
Light Fastness
6 [ISO 105 - B02]
Fastness to Rubbing
Wet: 4, Dry: 4 [ISO 105 - X12]
Bleach Cleanable
ISO 105 E03 colour change 4 for 10% chlorine solution
Waterproof
Hydrostatic head BS 3424 Part 26 > 1 metre
Urea Resistance
BS 3424 Part 19 no significant deterioration after 24 hrs
Anti-Microbial
AATCC 147
Cleaning
Wipe with a damp cloth and warm soapy water. Improved resistance to alcohol but avoid regular use and remove residue where possible. For full details, see vinyl technical guide.
Guarantee
5 Years

sierra

Product information

Sierra is an exquisitely soft natural leather. This stylish product with a pigmented grain-effect finish is virtually maintenance free, with a water-based sealant for added protection. The leather has a silky touch.

Technical information

Average size
4.20 m ²
Material thickness
0.9 mm + - 2 %
Raw material
Bovine leather
Flexing endurance
≥ 30.000
Tear strenght EN ISO 3377-1
≥ 20 N
Fastness to rubbing EN ISO 105-X12
Dry / Wet: 4-5
Light resistance EN ISO 105-B02
5
Adhesion IUF 470 UNI EN ISO 11644
≥ 3,50 N/cm
Fire resistance
UNI EN ISO 1021-1/2 passed
BS 5852 1990 Sec. 4 NI/0-1 passed
California T.B. 117 passed